

## Shiny Coater Shiny Coater

You can coat even in small recesses of tiny parts with this coater.





CHUCK

**Features** 

**Dip-Spin Coating System** 

High quality and flat thin coating layer

Changeable the coating conditions by using the touch-panel.


## **Applications**

- Bolts, Nuts, Stamping parts
- •Round bars, Pipes (basket mode)
- Parts which have complecated geometry (jig mode)



Suitable for small quantities of many products

## Dip-Spin Coater Shiny COat

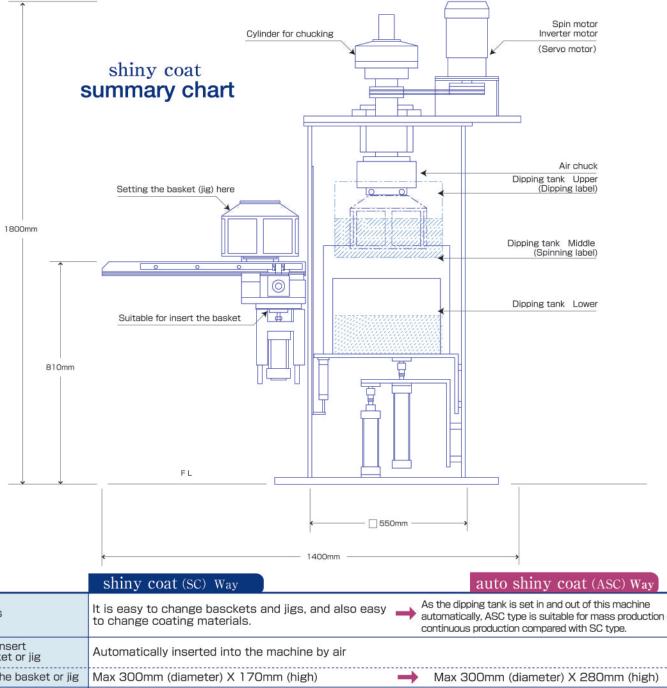

	Sillify Coat (SC) way	ay
Features	It is easy to change basckets and jigs, and also easy to change coating materials.  As the dipping tank is set in and out of this maching automatically, ASC type is suitable for mass production compared with SC type.	1.15
How to insert the basket or jig	Automatically inserted into the machine by air	
Size of the basket or jig	Max 300mm (diameter) X 170mm (high)   Max 300mm (diameter) X 280mm (high)	gh)
How to change dipping tanks	By using a dolly manually   By using a conveyer automatically	
Size of the dipping tank	390mm (diameter) X 260mm (high) Capacity 30L , Coating material 10L max  450mm (diameter) X 470mm (high) Capacity 70L , Coating material 25L	max
How to chuck the basket or jig	Middle sized automatic chuck with air system Chuck strength is rather strong Chuck the basket from inside to outside  Big sized automatic chuck with air sy Chuck strength is very strong	stem
Spin motor	2,2KW 600rpm (Spinning speed is changeable by the inverter ).   900rpm Servo motor	
Exhaust fan	2 Small fans	
Control panel	Touch panel system → Available for customizing	
Coating condition	Dipping-times, Spinning direction, Spinning speed, Cycle times	
Power	Electricity: 200V Air: 0.4MPA	
Options (Explpsion-proof type)	Explosion-proof motor, Remote control panel	

## ACE EQUIPMENT CO.,LTD



Telephone 059-383-7173



E-mail info@tecnoace.jp